




Geopro S.A.

24 Boulevard Initialis - 7000 Mons - BELGIUM

Tél. : +32 (0)65 346000 - Fax : +32 (0)65 346020

E-mail : info @geopro.be - Website : www.geopro.be

MDP-A 250 MIXER & PGP35-5 GROUT PUMP

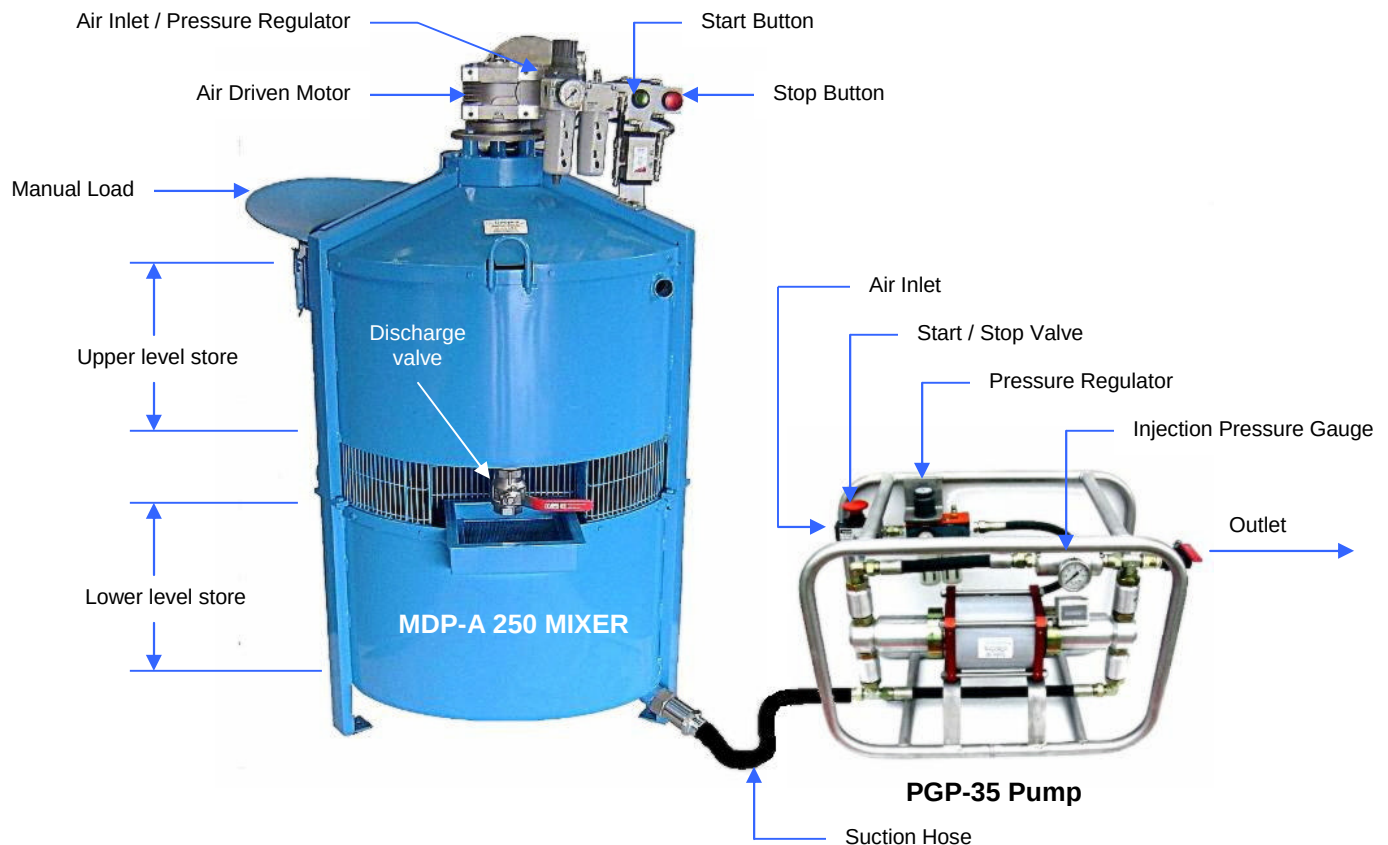

MDP-A 250 MIXER

MAIN SPECIFICATIONS

- Two level store of **250 lt/ each**
- Manual grout charging device at **105 cm** ground level
- Lubrifilter oil device at **6 bar**
- Safety guard device on the moving parts
- Start and stop device C.E. standard
- Max grout mixture production **3 m³/h**
- High **165 cm**
- Weight **140 kg**
- Store high **25 cm**
- Discharge grout valve **1 ½"** between the two storage device
- Discharge pipe connection **1 ½"**

PGP35-5 PUMP

MAIN SPECIFICATIONS

- Grout pressure **0-35 bar (0-500psi)**
- Inlet air pressure **0-7 bar (0-100 psi)**
- Flow rate **0-45 l/min**
- Air cylinder diameter **160mm**
- Fluid cylinder diameter **70mm**
- Suitable fluids water, bentonite mud, cement slurry
- Valves ball type
- Dimensions **700 x 500 x 400mm**
- Pump skid assembly weight **38 kg**
- Air inlet thread **1/2" BSP**
- Fluid inlet thread **3/4" BSP**
- Fluid outlet thread **3/4" BSP**
- Air consumption **1,5 m³/min**
- Pumped volume per cycle **0,4 litre**